



FT-EOL-EN

EOL Enclosure



Compatible with: Signaline FT-88-EN, FT-78-EN

IP66 enclosure

EN54-28:2016 approved

UV and chemical resistant

**Fire
detection**



Signaline





Model	Signaline FT-EOL-EN
Dimensions	94 x 94 x 57mm
Pack weight	0.1kg
IP rating	IP66
Operating temp.	-35°C to +55°C
Terminal blocks	EOL: 2x 5mm Rising Clamp Cable: 2x removable header 5mm Rising clamp
Cable glands	2x IP67 rated glands included
Mounting	Wall mounted 4x Ø4mm holes, 79mm apart
Material	Polycarbonate enclosure with non-ageing polyurethane seal
Colour	Grey (RAL 7035)
Approvals	EN54-28:2016, UL File no.: S24913

The Signaline FT-EOL-EN End-of-Line Unit has been approved to EN54-28:2016 for use with the LocatorPlus-EN Control Unit and FT-78-EN or FT-88-EN Signaline Linear Heat Detection cables.


It is designed to effectively terminate up-to two zones of FT-78-EN or FT-88-EN cable in a secure, weatherproof enclosure.

Furthermore, the built in switches for testing a fault and alarm condition allow the integrity of the whole system to be functionally checked in situ, providing comprehensive testing and maintenance of the system.

Visit Signaline.com for our full range of heat detection solutions




Wiring Diagram

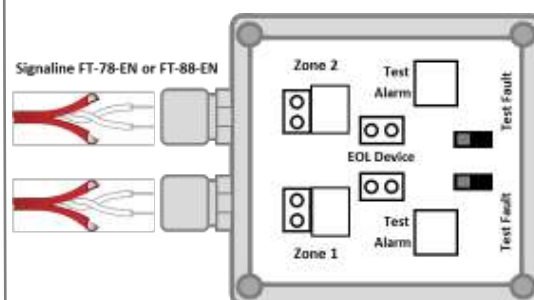

Conventional Systems



Addressable Systems

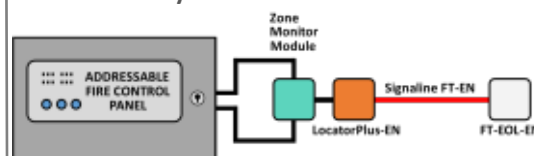

Hazardous Areas



Signaline FT-EN cable is proudly
manufactured in the UK