


SIGNALINE FT-78-EN
FIXED TEMPERATURE LINE
TYPE HEAT DETECTOR



Fixed alarm temperature of 78°C
No false alarms
Up to 1,000 m per zone
EN54-28:2016 approved

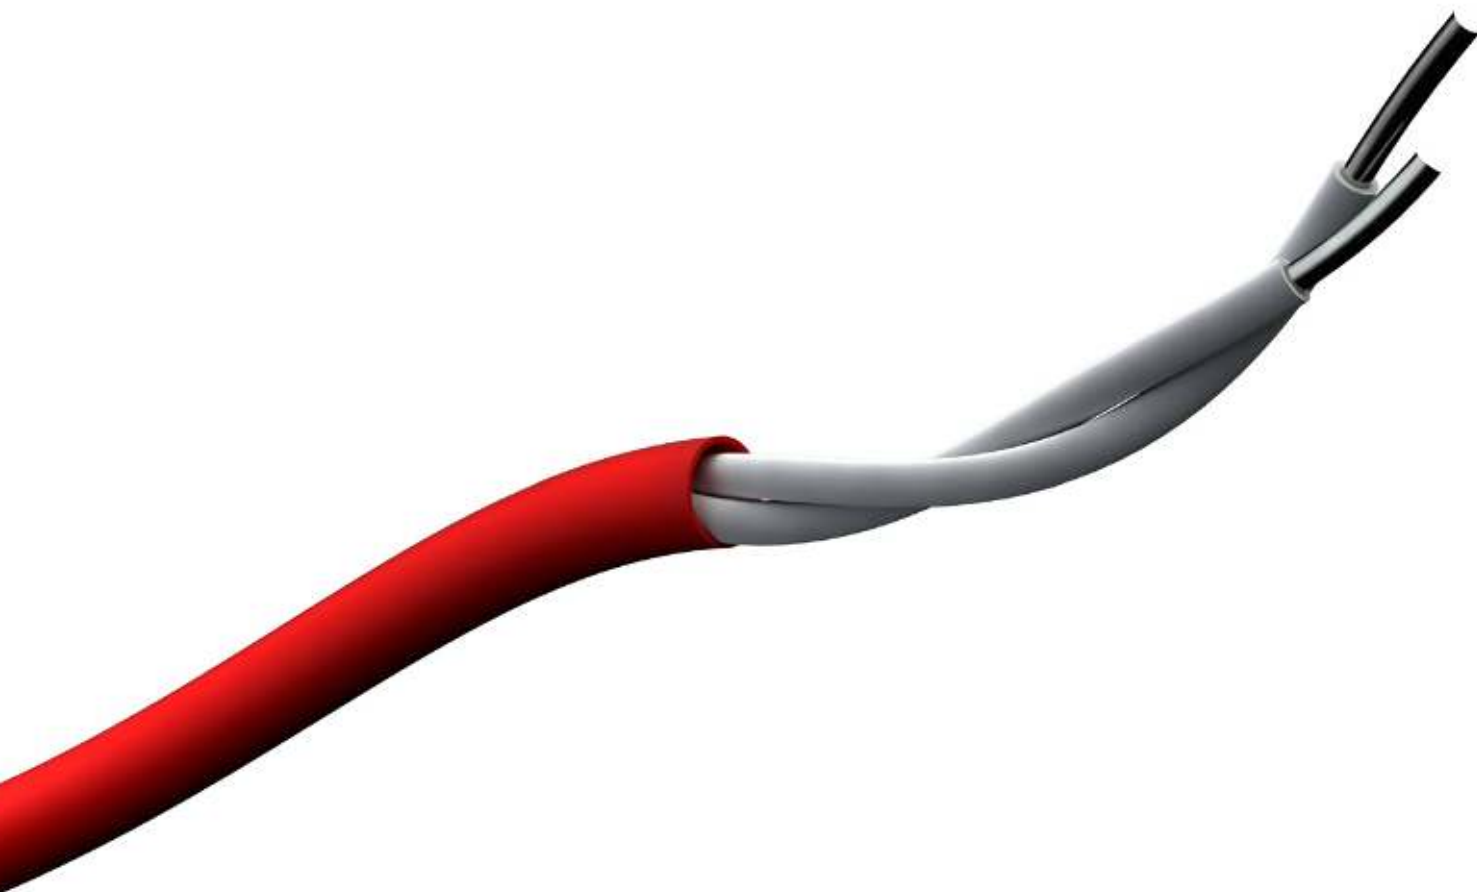

SIGNALINE FT-78-EN

FIXED TEMPERATURE LINE

TYPE HEAT DETECTOR

SPECIFICATION

Model	Signaline FT-78-EN
Max reel length	500 m (sold in 50 m increments, MOQ = 50 m)
Alarm temperature	78°C (155°F)
Max ambient temp.	45°C (113°F)
Min. ambient temp	-40°C (-40°F)
EN54-28 performance	T078-V10-A045
Environmental group	II
Conductor resistance	1.25Ω/M per core
Max voltage	74 V dc or 49 V ac
Humidity	0% to 98% RH
Insulation	1k V tested protective outer coating
Tensile strength	1700 N/mm ²
Minimum bend radius	100 mm
Overall diameter	5.72 mm
Weight	16 kg/500 M
Outer sheath	UV & chemical resistant sheath (red)
Features	Low-Smoke Zero Halogen (LSZH), UV Stable, Oil Resistant, Flame Retardant
Colour	Red
Approvals	EN54-28:2016, UL File no.: S24913, CE, ROHS

Signaline FT-EN Line Type Heat Detector (Signaline FT-EN) can detect a build-up of heat anywhere along its length. When any point along the length of the cable reaches a predetermined temperature an alarm is initiated.


Signaline FT-EN is approved by UL to EN54 part 28 as non-resettable line type heat detector. It is low smoke zero halogen and is available in either 78°C or 88°C alarm temperatures.

Multiple fixing options and accessories are available.
Visit Vimpex.co.uk for our complete catalogue.




Signaline FT-EN cable is proudly manufactured in the UK

Conventional Systems

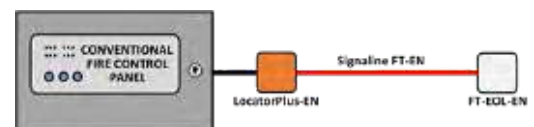

Addressable Systems

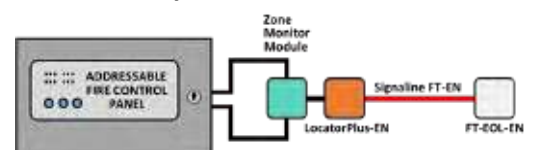

Hazardous Areas



FT-78-EN is to be used with the Signaline LocatorPlus-EN and the Signaline FT-EOL-EN