



As well as Fire, Bells still remain a popular choice for many applications such as schools where they can sometimes be used as a signal for class change. All CF bells incorporate highly efficient rotary centrifugal movements combining high sound output with low current consumption.


Features

- High sound output
- Classic design
- Simple installation
- For fire or non fire use

Benefits

- Delivers up to 95dB(A)
- Easily recognisable sound for instant recognition
- Easy to install with a multifixing baseplate
- Flexible usage

Dimensions

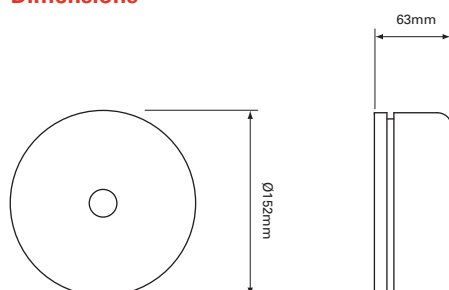

Technical Specification

Voltage	20-28Vdc
Current	25mA (typical) @ 24V
Sound Output	95dB(A) 24V
Monitoring	Reverse polarity
Temperature	- 10°C to + 55°C
Protection	IP21C
Construction	Gong - Steel, Base - Polycarbonate
Weight	0.85Kg
Colours	Gong - Red Base - Black

Catalogue Numbers

Reference	Cat No	Description
CFB6D12RED	521301FULL-1301	6 Inch Motorised Bell 12Vdc, Red (Centrifugal *)
CFB6D24RED	521601FULL-1601	6 Inch Motorised Bell 24Vdc, Red (Centrifugal *)

