

XP95 I.S. Optical Smoke Detector



Product overview

Product	I.S. Optical Smoke Detector
Part No.	55000-640

Compliance



Product information

The XP95 Intrinsically Safe (I.S.) Optical Smoke Detector works on the light scatter principle and is ideal for applications where slow burning or smouldering fires are likely.

- Well suited to escape routes
- Unaffected by wind or atmospheric pressure

Technical data

All data is supplied subject to change without notice. Specifications are typical at 22 V, 25°C and 50% RH unless otherwise stated.

Detection principle	Photo-electric detection of light scattered in a forward direction by smoke particles
Chamber configuration	Horizontal optical bench housing an infrared emitter and sensor arranged radially to detect scattered light
Sensor	Silicon PIN photo-diode
Emitter	GaAs infra-red light emitting diode
Sampling frequency	Once per second
Sensitivity	Nominal response threshold value of 0.12 dB/m when measured in accordance with EN 54-7
Supply Wiring	Two wire supply, polarity sensitive
Terminal functions	L1 Positive supply L2 Negative supply and remote LED negative +R Remote LED positive
Supply voltage	14 V - 22 V
Modulation voltage	5 V - 6 V
Quiescent current	340 µA
Power-up surge current	1 mA
Alarm indicator	Red light emitting diode (LED)
Alarm LED current	1 mA
Remote LED current	1 mA (internally limited)
Storage temperature	-30°C to +80°C
Operating temperature	-20°C to +45°C (T5) -20°C to +60°C (T4)
Guaranteed temperature range	-20°C to +60°C
Humidity	0% to 95% RH (no condensation or icing)
Vibration, impact & shock	To EN 54-7
IP Rating	IP 44
Standards and approvals	EN 54, MED, LR, BV, ABS, CCS, KR, CCCf, LPCB, CPR, EAC, BOSEC, ATEX, IECEX, SBSC, DNV.GL, SIL, PESO, RINA
BASEEFA Certificate No.	BAS02ATEX1289X
IECEX Certificate No.	IECEX BAS 12.0091X
Classification (max ambient)	Ex ia IIC T4 GA (≤ +60°C) Ex ia IIC T5 GA (≤ +45°C)
Dimensions	100 mm diameter x 42 mm height
Weight	105 g
Materials	Housing: White flame-retardant polycarbonate Terminals: Nickel plated stainless steel



Operation

The I.S. Optical has an infrared light emitting diode within its collimator which is arranged at an obtuse angle to the photo-diode. The photo-diode has an integral daylight blocking filter.

The infrared LED emits a burst of collimated light every second. In clear air the photo-diode receives no light directly from the infrared LED because of the angular arrangement and the dual mask. When smoke enters the chamber it scatters photons from the emitter infrared LED onto the photo-diode in an amount related to the smoke characteristics and density. The photo-diode signal is processed by the optical ASIC and passed to the A/D converter on the communications ASIC ready for transmission when the device is interrogated.

Electrical description

The I.S. Optical Smoke Detector is designed to be connected to a two wire loop circuit carrying both data and a 14 V to 22 V dc supply. The detector is connected to the incoming and outgoing supply via terminals L1 and L2 in the mounting base. The detector is calibrated to give an analogue value of 25 ± 7 counts in clean air. This value increases with smoke density. A count of 55 corresponds to the EN 54 alarm sensitivity level.

Environmental characteristics

The I.S. Optical Smoke Detector is unaffected by wind or atmospheric pressure and operates over the temperature range -20°C to $+60^{\circ}\text{C}$, according to the installation classification.


Remote LED connection

A drive point is provided on the XP95 I.S. Optical Smoke Detector for a remote LED indicator. The indicator must be a standard high-efficiency RED LED and does not require a series limiting resistor since current is limited within the detector to approximately 1 mA. Unlike the standard XP95 range, the remote LED cannot be controlled independently from the integral LED since it is effectively connected in series with the integral LED. The benefit of this configuration is that the illumination of the LED does not increase the current drawn from the loop.

System certification allows for the use of any LED indicator having a suitable surface area between 20 mm^2 and 10 cm^2 which covers all commonly used case styles from T1 (3 mm) upwards but would exclude some miniature and surface mounted types. Additional requirements of the certification are that the LED and its terminations must be afforded a degree of protection of at least IP20 and must be segregated from other circuits and conductors as defined in BS EN 60079-14.

The Apollo MiniDisc Remote Indicator, Part No. 53832-070, is suitable using terminals B and C.

XP95 I.S. Optical Smoke Detector sectional view

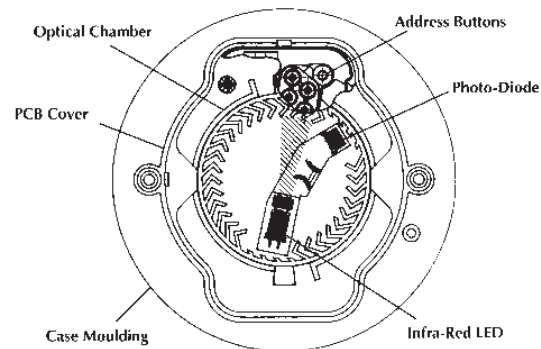

EMC Directive 2014/30/EU

The XP95 I.S. Optical Smoke Detector complies with the essential requirements of the EMC Directive 2014/30/EU.

A copy of the Declaration of Conformity is available from our website - www.apollo-fire.co.uk

Construction Products Regulation (EU) 305/2011

The XP95 I.S. Optical Smoke Detector complies with the essential requirements of the Construction Products Regulation (EU) 305/2011.

A copy of the Declaration of Performance is available from our website - www.apollo-fire.co.uk

Conformity of the XP95 I.S. Optical Smoke Detector with the EMC Directive, does not confer compliance with the directive on any apparatus or systems connected to them.

Marine Equipment Directive 2014/90/EU

The XP95 I.S. Optical Smoke Detector complies with the essential requirements of the Marine Equipment Directive 2014/90/EU.

ATEX Directive 2014/34/EU

The XP95 I.S. Optical Smoke Detector complies with the essential requirements of the ATEX Directive 2014/34/EU.

