

TCA-0066


Dual galvanic ISO IS EEx ia IIC

Function

This isolated barrier is used for intrinsic safety applications. It supplies power to solenoids, LEDs, and audible alarms located in a hazardous area.

It is loop powered, so the available energy at the output is received from the input signal. The output signal has a resistive characteristic. As a result the output voltage and current are dependent on the load and the input voltage.

At full load, 10 V at 45 mA is available for the hazardous area application.

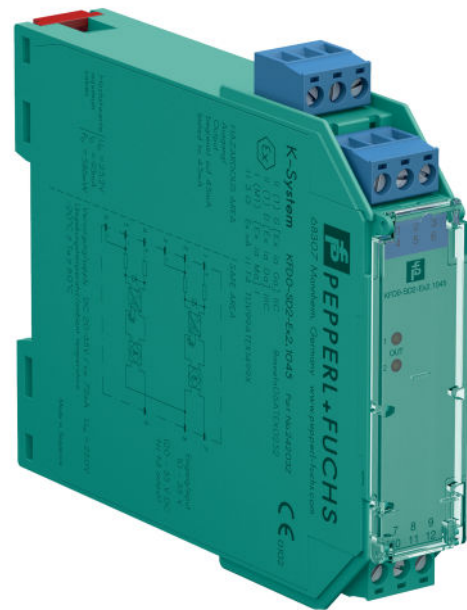

Details

- 2-channel isolated barrier

TCA-0066

Dual galvanic ISO IS EEx ia IIC

Technical specifications

Electrical

Tipo de fuente de alimentación	24 VCC
--------------------------------	--------

Physical

Tipo de Montaje	Carril DIN
-----------------	------------

Regulatory

Certificación	UL
---------------	----

Normativas	IEC/EN 61508
------------	--------------



Como empresa innovadora, Carrier Fire & Security se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 27 April 2023 - 15:20